


# PLAN NOTES

1. ALL DOUBLE DOORS TO BE FACTORY FINISH GLASS WITH WOOD WINDOW STOPS AND NO ASTRAGALS (NO METAL TRIM AROUND GLASS OR LENGTH OF DOOR, UNLESS OTHERWISE NOTED).
2. PROVIDE THERMOSTAT COVERS ON ALL THERMOSTATS.
3. DESIGNATE (4) PARKING SPACES AS 'ITT VISITOR' NEAR MAIN ENTRANCE TO LOBBY.
4. ITT SPACEPLAN TO BE REVIEWED BY LOCAL ARCHITECT FOR CODE COMPLIANCE. COORDINATE ANY CONFLICTS WITH ITT PRIOR TO SIGNING OF LEASE.
5. CLOCK MOUNTING HEIGHT TO BE CENTERED BETWEEN TOP OF MARKER BOARD PAINTED BLUE BORDER, AND HEIGHT OF CEILING. TYPICAL IN ALL CLASSROOMS.
6. ALL CLASSROOMS TO RECEIVE (3) SWITCHES. FIRST SWITCH TO BE MOUNTED 6' FROM SIDELIGHT FRAME, AND SHALL CONTROL THE CAN LIGHTS ABOVE THE MARKER BOARDS. SECOND SWITCH SHALL CONTROL THE POINT OF THE CLASSROOM. SPECIFICALLY IN THAT ORDER: INSTALL ALL (3) SWITCHES WITH 3-SWITCH FACEPLATE.
7. TYPICALLY, SWITCHES TO BE INSTALLED 6' FROM SIDELIGHT FRAME. REFERENCE FURNITURE PLAN FOR SWITCH PLACEMENT AS TO NOT CONFLICT WITH FURNITURE.
8. PROVIDE LIGHT SENSORS AS INDICATED IN SPECIFICATIONS.
9. CAULK ALONG ALL DOOR AND SIDELIGHT FRAMES AT BBT FLOORING.
10. CAULK BETWEEN BACKSPLASH AND WALL WHERE MILLWORK IS INSTALLED.
11. ALL CORRIDOR LIGHTING SHALL BE CENTERED IN CORRIDOR, WITH 4' SECTION RUNNING PARALLEL TO WALLS.
12. ALL WINDOWS TO RECEIVE WINDOW STILLS; SEE SPECIFICATIONS.
13. COLUMNS TO BE HIDDEN IN WALLS WHERE POSSIBLE. WALLS TO BE FLUSH WITH COLUMN WHERE MARKER BOARDS ARE LOCATED.

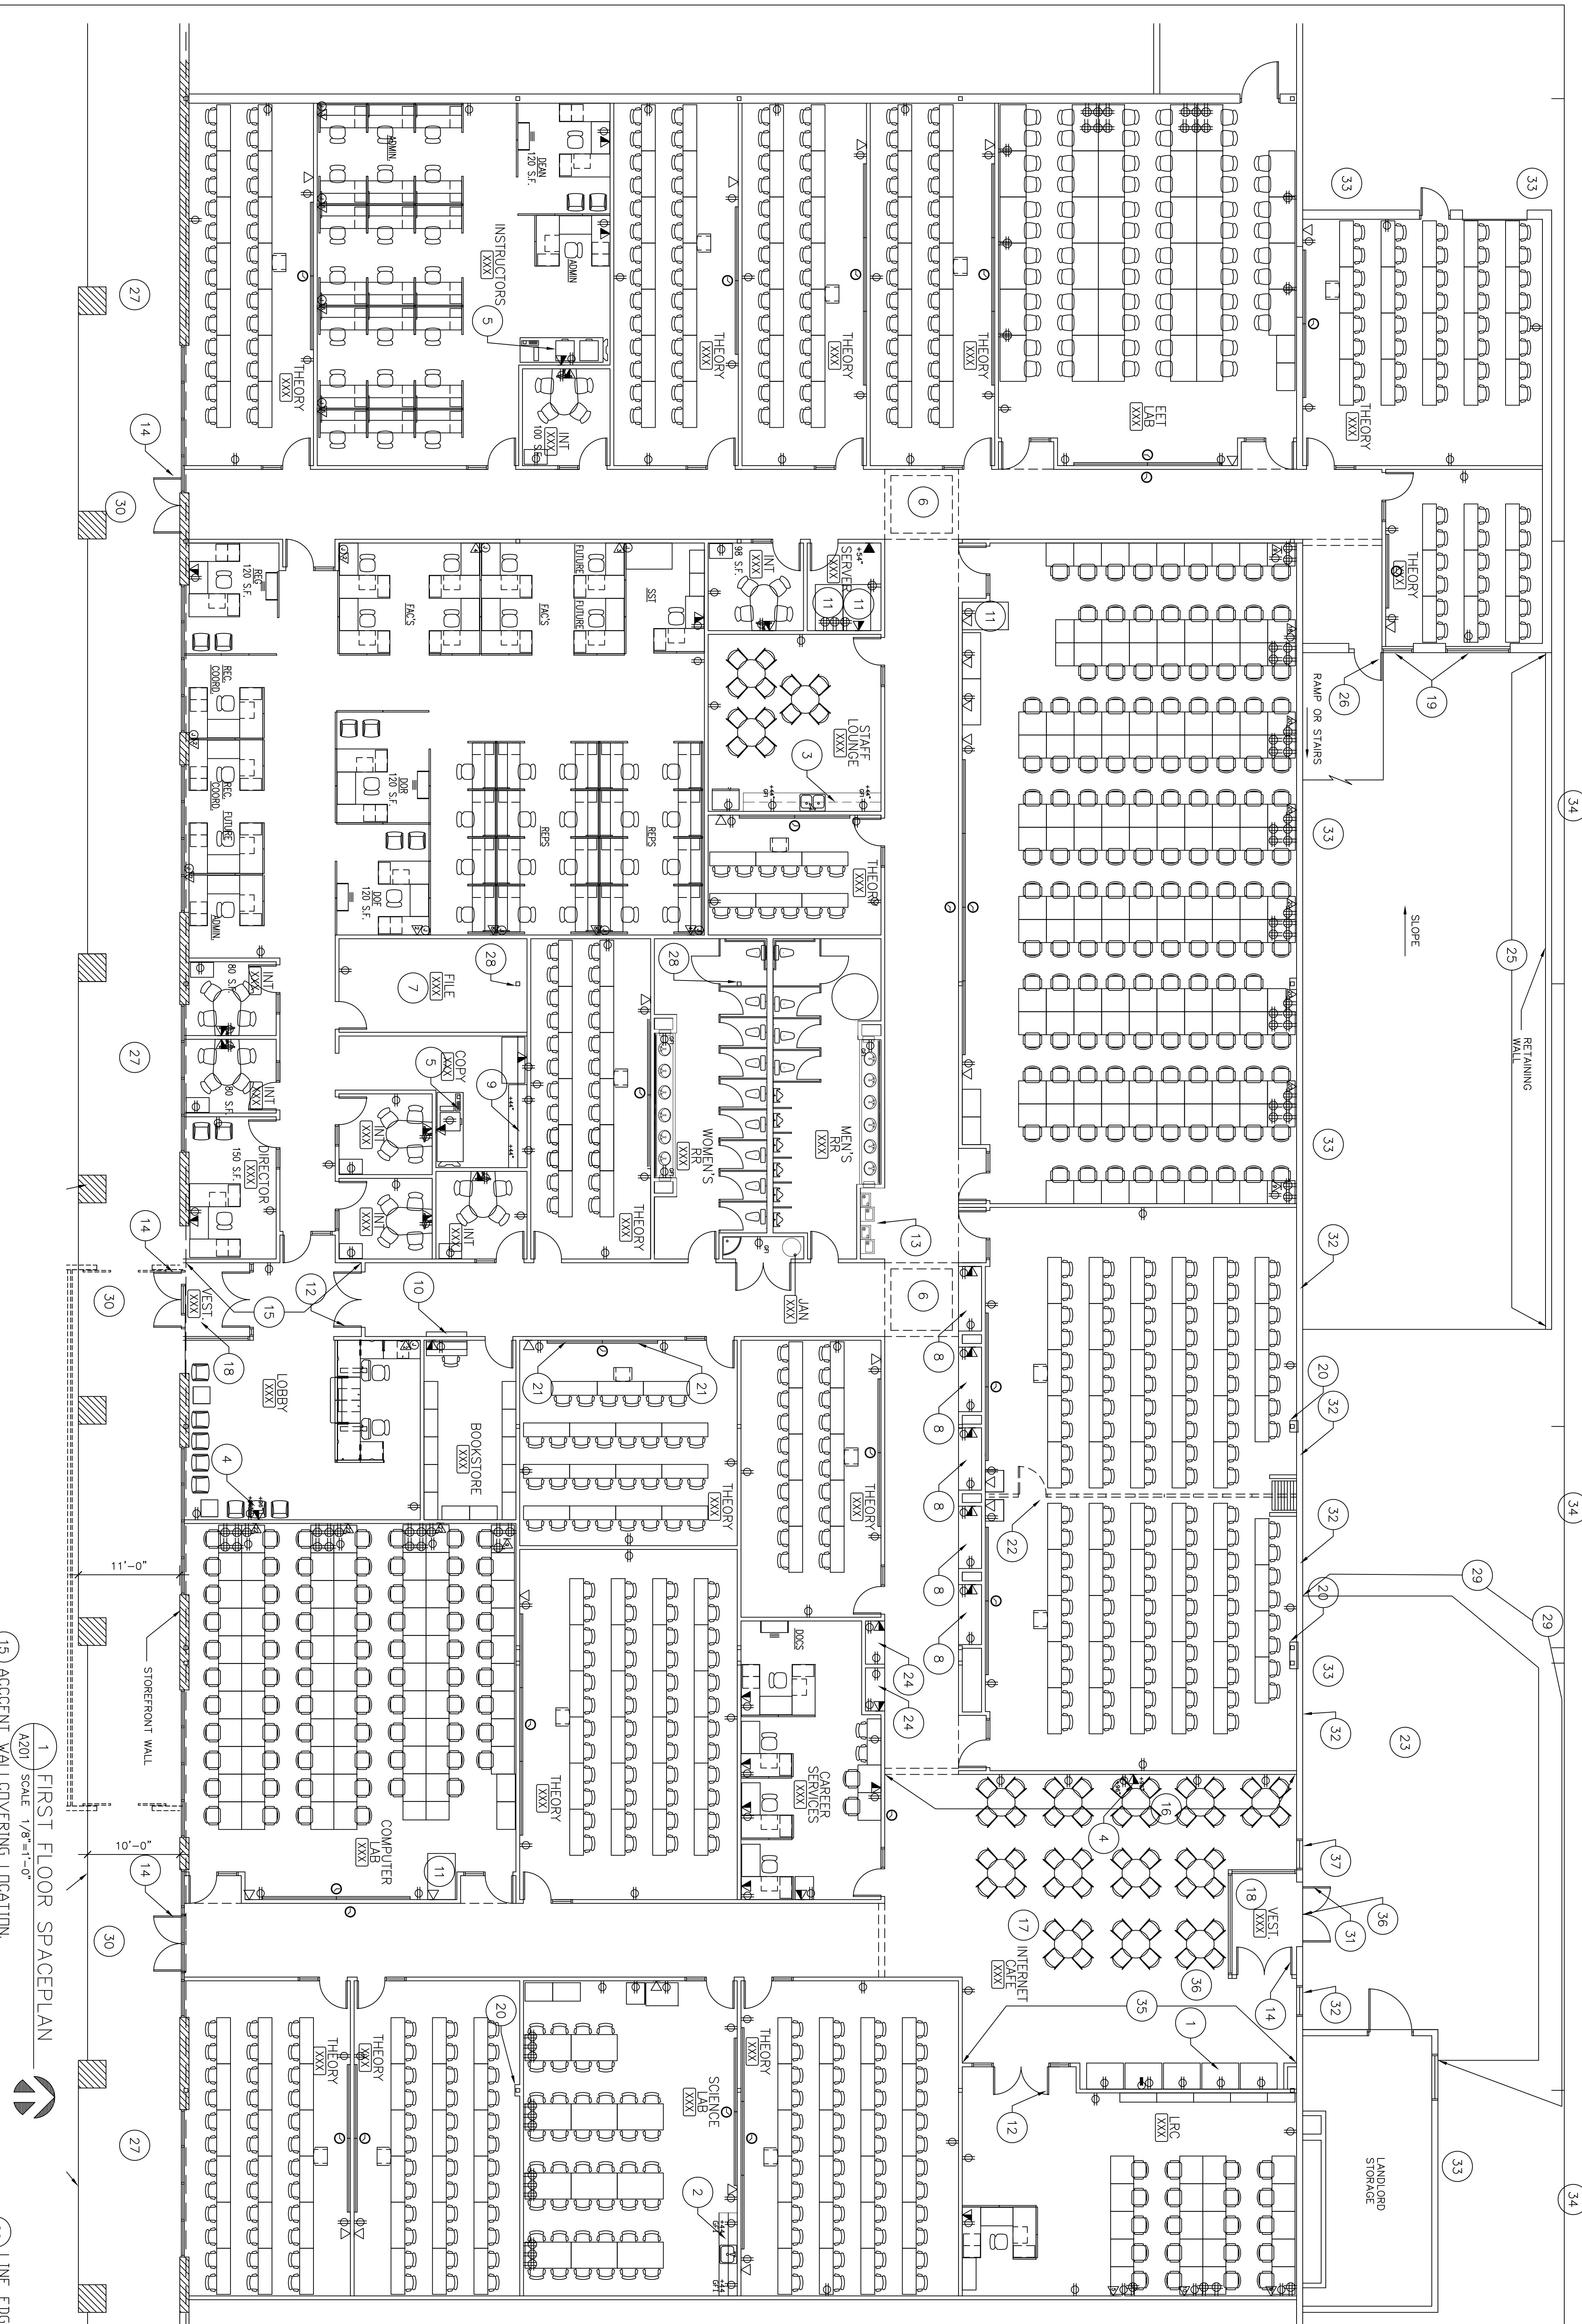

## PLAN KEY NOTES

1. PROVIDE RECESSED WATER LINE WITH T-VALVE.
2. PROVIDE UPPER AND LOWER LOCKABLE CABINETS, SINGLE SINK AND LAMINATE COUNTERTOP AND BACKSPLASH.
3. PROVIDE UPPER AND LOWER CABINETS, LAMINATE COUNTERTOP, BACKSPLASH, DOUBLE SINK, AND GARBAGE DISPOSAL.
4. PROVIDE DATA & ELEC. FOR WALL MOUNTED TELEVISION.
5. COPER LOCATION; SEE SPECIFICATIONS FOR ELECTRICAL REQUIREMENTS.
6. CORRIDOR INTERSECTION. SEE SPECIFICATIONS FOR DETAILS.
7. WALLS AND DOOR TO HAVE 1-HOUR (60 MIN.) FIRE RATING.
8. PROVIDE 30" DEEP DISPLAY CASES; SEE SPECIFICATIONS.
9. PROVIDE BASE CABINETS, LAMINATE COUNTERTOP, AND BACKSPLASH.
10. PROVIDE LOCKABLE PASS-THRU PER DETAIL IN SPECIFICATIONS.
11. RACK LOCATION.
12. INSTALL NEW FACTORY FINISH GLASS DOUBLE DOORS WITH WOOD WINDOW STOPS AND ASTRAGALS WHERE INDICATED.
13. PROVIDE NEW WATER FOUNTAINS & HARDWARE ELECTRICAL.
14. PROVIDE ITT WITH FINISH SUBMITTAL.
15. ACCENT WALL COVERING LOCATION.
16. PAINT AREA MERLOT WHERE INDICATED.
17. OPEN CEILING TO DECK TO BE PAINTED BLACK, AS SPECIFIED.
18. VESTIBULE TO RECEIVE CERAMIC TILE; SEE SPECIFICATIONS.
19. REPLACE EXISTING DOCK DOOR WITH GLASS, AS SHOWN.
20. MINIMIZE COLUMN WRAP WHERE INDICATED.
21. PROVIDE 6'-0" MARKER BOARD AS SHOWN. SAME MANUFACTURER AND MODEL AS SPECIFIED FOR THE TYPICAL 8'-0" BOARDS.
22. PROVIDE MOVABLE WALL SYSTEM PER SPECIFICATIONS.
23. PROVIDE NEW STAMPED CONCRETE PATIO AREA PER SPECIFICATIONS. PROVIDE BOLLARD LIGHTING. PROVIDE PROPOSED LANDSCAPE PLANS FOR ITT'S APPROVAL. EXISTING CANOPY TO REMAIN EXISTING, MAKE ANY REPAIRS IF NEEDED.
24. PROVIDE 18" DEEP DISPLAY CASES; SEE SPECIFICATIONS.
25. EXISTING RAILING AT RAMP AREA TO BE REPAIRED, Sanded AND REPAINTED. REFINISHED TO GOOD CONDITION, OR TO BE REPLACED WITH NEW RAILING. EXISTING RETAINING WALL TO BE CLEANED AND PAINTED.
26. INSTALL NEW GLASS SINGLE EXIT DOOR.
27. ARCHITECT TO REDESIGN FRONT FACADE TO COORDINATE WITH INTERIOR LAYOUT. PROVIDE ITT WITH PROPOSED DESIGN FOR APPROVAL PRIOR TO SIGNING OF LEASE.
28. PAINT EXPOSED COLUMN.
29. LINE EDGE OF PATIO AREA WITH DECORATIVE RAILING AND TALL ARBOVYITE OR SIMILAR SHRUBS AND POTTED PLANTS TO CREATE NATURAL SCREEN AROUND OUTDOOR LOUNGE. PROVIDE ADA COMPLIANT CURB CUT.
30. PROVIDE ADA COMPLIANT CURB CUTS WITH ACCESS TO PARKING AREA.
31. INSTALL DOUBLE GLASS EXIT DOORS AT EXISTING DOCK DOOR LOCATION.
32. ADD NEW WINDOWS. SUBMIT DETAILS TO ITT FOR APPROVAL.
33. EXTERIOR OF BUILDING TO BE CLEANED AND PAINTED IN ITS ENTIRETY.
34. CONCRETE RETAINING WALL TO BE ALONG ENTIRE REAR OF PROPERTY.
35. PAINT VENDING AREA SEAL SKIN WHERE INDICATED.
36. INSTALL TRANSOM WINDOWS ABOVE EXTERIOR EXIT DOORS AND VESTIBULE DOORS. COORDINATE WITH ADAM KLEEMAN AT ITT.
37. REPLACE EXISTING METAL DOOR WITH GLASS. SHALL MATCH NEW WINDOW ON OPPOSITE SIDE OF VESTIBULE.

THEORY ROOMS:	16
COMPUTER LABS:	2
EET / INVASIVE LABS:	1
SCIENCE LABS:	0
NURSING LAB:	0
TOTAL CLASSROOMS:	20
TOTAL INTERVIEW ROOMS:	7
TOTAL CLASSROOM SEATS:	790
TOTAL USF:	30,703
TOTAL RSF:	30,703
TOTAL SEATS PER 1,000 SQ.FT.:	25.73

1 FIRST FLOOR SPACEPLAN  
A201 SCALE 7/8"=1'-0"